

CompactClean, NoEX, Loose Components

By choosing of a CompactClean ballast water management solution you will experience simplicity in the daily operation of your vessel. One global full flow mode worldwide – as simple as that! The solution has superior UV power to meet the strict requirements for ballast operation in US-waters. This means risk of mixing IMO and USCG treated ballast water will be eliminated.

One global operation mode


The selection of either IMO or US mode can be very complicated, if the operator does not know at the time of uptake, where the ballast water is going to be discharged. With the CompactClean system you will not need a special mode to comply with USCG requirements. You just have one global mode for worldwide operation. The advantage of using a single operation mode globally is that it removes the need to know the de-ballast location

at the time of ballast uptake. This means the ship can never get into a situation where the ballast water on board is compliant for discharge in one location, but not in another.

The CompactClean has been certified to treat ballast water with UV transmission at record-breaking 40% in its global mode. Most competing systems will go out of compliance as early as 70% UV-T in USCG waters.

Loose Component Delivery

The loose component configuration provides maximum flexibility in terms of deployment. This is the typical choice for retrofit projects as all components freely can be placed where there is enough room for them. This configuration contains all components excepts electrical wiring and pipe spools, which will be customized for the vessel.

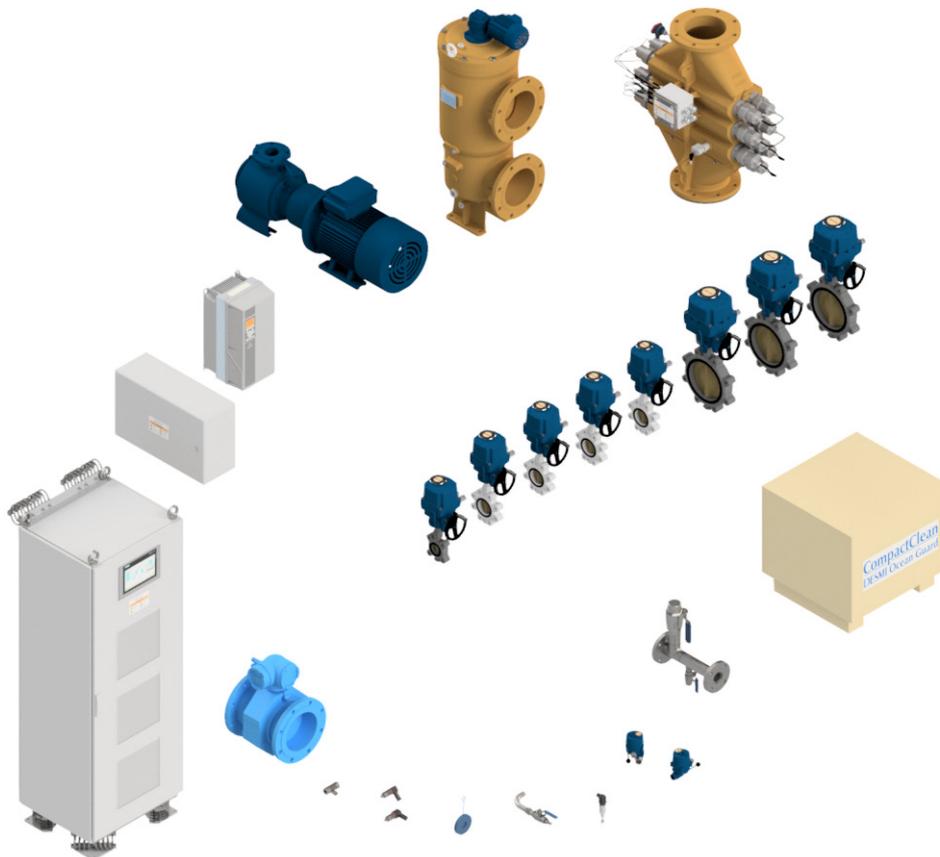

CompactClean, Non-EX, Loose Components

Description	CC35	CC85	CC135	CC250	CC340	CC500	CC750	CC1000	CC1500
Global Mode Max Flow [m ³ /h] - Ballast	35	85	135	250	340	500	770	1040	1500
Global Mode Max Flow [m ³ /h] - De-Ballast	40	85	160	250	340	500	870	1180	1740
Min Flow Ballast [m ³ /h] Filter	8	15	25	35	45	50	65	95	126
Min Flow De-Ballast [m ³ /h] UV unit	5	5	5	9	9	13	19	26	38
Min Power required UV-T > 100% UV lamps dim to 50% [kW]	4,0	8,0	12,0	18,0	24,0	36,0	54,0	72,0	108,0
Avg. Power required UV-T = 85% UV lamps dim to 76% [kW]	6,1	12,2	18,2	27,4	36,5	54,7	82,1	109,4	164,2
Install Power required UV-T < 65% All components running [kW]	12,0	21,0	36,0	54,0	67,0	93,0	131,0	169,0	245,0
Maximum Current At 440V [A]	19,0	31,0	48,0	73,0	106,0	126,0	177,0	229,0	332,0
Main Cabinet L x W x H [mm] Weight [kg]	606 x 594 x 1795mm 232 kg	606 x 594 x 1795mm 242 kg	606 x 594 x 1795mm 247 kg	606 x 594 x 1795mm 262 kg	606 x 594 x 1795mm 272 kg	606 x 679 x 2171 mm 349 kg	1206 x 579 x 1771 mm 498 kg	1203 x 700 x 2208 mm 677 kg	1203 x 700 x 2208 mm 788 kg
UV Unit H x W x D [mm] Dry Weight [kg]	317,5 x 611 x 531 mm 42,6 kg	405 x 611 x 576 mm 61 kg	772 x 661 x 406 mm 112 kg	776 x 828 x 438 mm 150 kg	902 x 828 x 446 mm 190 kg	852 x 828 x 516 mm 222 kg	986 x 838 x 541 mm 331 kg	1032 x 838 x 628 mm 390 kg	1102 x 844 x 722 mm 580 kg
Filter H x W x L [mm] Weight [kg]	600 x 360 x 360 mm 75 kg	800 x 360 x 360 mm 98 kg	950 x 450 x 450 mm 131 kg	1150 x 500 x 500 mm 288 kg	1200 x 500 x 500 mm 322 kg	1300 x 650 x 650 mm 527 kg	1550 x 700 x 700 mm 757 kg	1750 x 800 x 800 mm 900 kg	2240 x 850 x 850 mm 1020 kg
Pump L x W x H [mm] Weight [kg] Stripping flow	ESL40 543 x 290 x 253 mm 49 kg No stripping	ESL40 543 x 290 x 253 mm 49 kg No stripping	570 90,3 x 300 x 366 mm 135 kg 40m ³ /hr@17mH	580 1041 x 350 x 440 mm 236 kg 75m ³ /hr @20mH	580 1041 x 350 x 440 mm 236 kg 75m ³ /hr @20mH	580 1041 x 350 x 440 mm 236 kg 75m ³ /hr @20mH	580 1041 x 350 x 440 mm 236 kg 75m ³ /hr @20mH	5100 1041 x 350 x 440 mm 250 kg 75m ³ /hr @20mH	5100 1041 x 350 x 440 mm 250 kg 75m ³ /hr @20mH
VFD H x W x D [mm] Weight [kg]	No VFD	No VFD	480 x 242 x 260 mm 23 kg	481 x 242 x 260 mm 23 kg	482 x 242 x 260 mm 23 kg	483 x 242 x 260 mm 23 kg	484 x 242 x 260 mm 23 kg	485 x 242 x 260 mm 23 kg	486 x 242 x 260 mm 23 kg
External Control Box H x L x W [mm] Weight [kg]	380 x 600 x 210 mm 25,2 kg	380 x 600 x 210 mm 25,2 kg	380 x 600 x 210 mm 25,2 kg	380 x 600 x 210 mm 25,2 kg	380 x 600 x 210 mm 25,2 kg	380 x 600 x 210 mm 25,2 kg	380 x 600 x 210 mm 25,2 kg	380 x 600 x 210 mm 25,2 kg	380 x 600 x 210 mm 25,2 kg